



Automatic measuring system for telephone cables



Indicative picture

- ☞ Designed to measure all types of telecom cables
- ☞ Checked against certified ISO 17025 standards (LF)
- ☞ Automatic calibration
- ☞ High accuracy
- ☞ Fast measurements
- ☞ Easy to operate
- ☞ State-of-art software package
- ☞ Highly modular to fit any requirement
- ☞ Can be upgraded with many options such as ISO 17025 certified HF or LF calibration standards, additional Technical software licenses



<b>Delivery package</b>	<p>a) One central trolley including:</p> <ul style="list-style-type: none"> <li>○ One Low Frequency measurements technology type LF 9100</li> <li>○ One state-of-art computer with a 17" color monitor</li> <li>○ Operating Windows system</li> <li>○ One AESA measurement and result management software Optitest (1 license)</li> <li>○ Power supplies, interfaces, connecting cables and measurement accessories</li> <li>○ UPS unit 600 W</li> </ul> <p>b) 2 x 104 pairs connecting frame (Near + Far-End) for LF &amp; HF measurements up to 10 MHz</p> <p><i>Remark: the network analyzer is not included in the offer. We can integrate an analyzer provided by the customer upon request.</i></p>
<b>Article No:</b>	05.1104.0001.0



1. **Technical hardware features**

- Test heads with "open/short/load" facility allowing a fully automatic calibration procedure
- No other calibration is required, which speeds up the measurements
- For a fast cable connection, the standard connecting frames are equipped with self-cutting knives designed for copper diameters from 0.35mm to 0.9mm. Special knives are available on request for diameter up to 1.5mm. Our system does not include any movable parts to ensure a very high reliability level
- No movable parts to ensure a very high reliability level
- Mechanical design studied to facilitate maintenance and servicing operations

***Important comments:***

- a) The OptiTest software is delivered with AESA ATE system. It allows preparing, performing, evaluating and managing the measurements. Optitest works in stand-alone and is protected with one hardware license dedicated to the concerned system.

OptiTest can be easily upgraded to CIQ 3.0, the AESA quality data management system, in keeping the same human-machine interface. CIQ 3.0 enables connecting the system to the company's LAN. AESA highly recommends migrating to CIQ 3.0 if several equipment are utilised.

In this way, all the specifications can be prepared at the office station (e.g. Quality Manager) and further used at any testing station. All the results are saved on the same server enabling consolidated reports, data evaluations and group analysis. Data can be easily interfaced with an ERP or accessible from other office stations through intranet as example (Industry 4.0).

CIQ not only handles the AESA testing equipment but can interface any other quality data equipment (electrical, mechanical, and dimensional) as well as process data (production monitoring).

- b) **The remote maintenance** feature is using TeamViewer and allows AESA to get access to the customer's system using an internet connection. This allows updating or correcting the software, as well as diagnosing the reason of a breakdown in the system. The cost for an intervention using the remote maintenance is based on the addition of following points:

During the warranty period: Free of charge

Outside the warranty period: Working time of the AESA engineer



2. **LF parameters testing**

The low frequency parameters measuring technology provides a self-calibration. It is designed to test pairs and quads. Different measuring frequencies (from 12.5 to 1000 Hz) are integrated in the capacitance bridge in two versions: one version provides measurements at 12.5, 125 and 800Hz, the second one at 12.5, 125 and 1'000Hz. Please specify which type you prefer when ordering.

Description	Designation for pairs	Designation for quads	Accuracy	Scale
Conductor resistance	Ra, Rb	Ra, Rb Rc, Rd	± 0,1% + 10 mΩ	0 - 19,999 kΩ
Loop resistance	R	R1, R2		
Resistance unbalance	DR	DR1, DR2, DR3	Computed	%, Ω
Capacitance	C	C1, C2, C3	± 0,25% ± 10pF at 800 Hz ± 0,25% ± 10pF at 125 Hz ± 0,25% ± 50pF at 12,5Hz	0 – 2'000nF
Capacitance unbalance	K	K1 – K12	± 1% ± 6pF at 800 Hz ± 1% ± 3pF at 125 Hz ± 1% ± 30pF at 12,5 Hz	
Capacitance unbalance to ground	Ei, Ea, E	Ei1-Ei3 Ea1-Ea3 E1-E3		

**Calculated parameters at 800Hz – 1 kHz**

Attenuation  
Characteristic Impedance  
Crosstalk

Phase  
Velocity of propagation (VOP)

**Statistical parameters**

Maximum and minimum measured values  
Absolute minimum measured value  
Average value  
Quadratic average  
Standard deviation

Upper quality factor  
Lower quality factor  
RC product  
Standard deviation RC  
Variance

3. **HF parameters**

**3.1. Measured parameters**

➤ **Attenuation (corrected at 20°C)**

Accuracy	1 kHz - 30 kHz	30 kHz - 100 kHz	100 kHz - 2 MHz	2 MHz – 10 MHz
-30 dB to -80 dB	± 0.8 dB	± 1 dB	± 1.5 dB	± 2 dB
-10 dB to -30 dB	± 0.6 dB	± 0.8 dB	± 1.2 dB	± 1.5 dB
0 dB to -10 dB	± 0.2 dB	± 0.3 dB	± 0.4 dB	± 0.7 dB



➤ Near-End Crosstalk NEXT & Far-End Crosstalk FEXT

Accuracy	1 kHz - 30 kHz	30 kHz - 100 kHz	100 kHz - 2 MHz	2 MHz - 10 MHz
-70 dB to -100 dB	± 2.5 dB	± 3 dB	± 3.5 dB	± 4 dB
-40 dB to -70 dB	± 1.5 dB	± 1.8 dB	± 2 dB	± 3 dB
-10 dB to -40 dB	± 1 dB	± 1.2 dB	± 1 dB	± 1.2 dB

➤ Impedance (open/short and terminated 100Ω)

Accuracy	1 kHz - 100 kHz	100 kHz - 10 MHz
85Ω - 135Ω	± 2%	± 1.5%
75Ω - 155Ω	± 3%	± 4%

**Calculated parameters at 800Hz – 1 kHz**

Attenuation  
Characteristic Impedance  
Crosstalk

Phase  
Velocity of propagation (VOP)

**Statistical parameters**

Maximum and minimum measured values  
Absolute minimum measured value  
Average value  
Quadratic average  
Standard deviation

Upper quality factor  
Lower quality factor  
RC product  
Standard deviation RC  
Variance

**3.2. Calculated HF Parameters**

- Fitted Impedance
- Return Loss (RL) (Open/Short and Terminated 100Ω) (fully complex method)
- NEXT Worst Case, Power Sum, Power Sum Worst Case
- FEXT Worst Case, Power Sum
- Individual ACR, ACR Worst Case, Power Sum ACR
- Global Power Sum (NEXT + FEXT)
- ELFEXT Pair to Pair, Worst Case, Power Sum, Power Sum Worst Case
- Velocity of Propagation (VOP)
- Propagation Delay (Phase Delay), Group Delay, Delay Skew
- Etc...



### 3.3. Statistical HF Parameters

#### **Statistical HF means (pair)**

Maximum value, absolute maximum value  
Minimum value, absolute minimum value  
Average value, absolute average value  
Standard deviation, standard deviation (n-1)  
Average standard deviation  
Quadratic average  
Minimum margin, average margin  
Etc...

#### **Statistical HF means (cable)**

Minimum and maximum value  
Frequency for minimum or maximum values  
Pair for minimum or maximum values  
Minimum margin to the limit  
Frequency of minimum cable margin  
Value for minimum cable margin  
Average of the minimum margin for each pair  
Etc...

## 4. Main software features

OptiTest is a stand-alone application specially designed for the cable and wire data capture with AESAs and former M.E.A. automatic testing equipments. This module is a part of the AESAs's Quality Management System CIQ 3.0 designed for the cable manufacturers.\*

- The software has been developed in the Microsoft® Windows™ environment and complies with the Windows features.
- User-friendly OptiTest software package, to be operated easily with a mouse or the keyboard.
- All data gathered with OptiTest can be used for further statistical evaluations and combined with other measurements gathered during the overall production process, from incoming good inspection until to the dispatch of the finished product.
- No HF or LF knowledge required, ideal for shop floor integration.
- Driver for the implemented Network Analyzer.
- Full automatic measurements.
- The measurements can be performed in the sweep mode and/or by using frequency tables.
- Open choice for start/stop frequencies and number of points (for HF sweep measurements, the test system allows to enter an unlimited number of measurement points, which is not limited by the specified number of points described in the manual of the Analyzer itself.
- Choice of logarithmic or linear scales.
- Fully self-configurable reports.
- Fully automatic calibration management including automated calibration procedure, calibration management depending on parameters to be measured.
- Possibility to create an unlimited number of cable specifications and test sequences. These "test specifications" will be stored with an individual customised name and are easily used by the operator for the call up of the specific cable type to be tested.
- Possibility to generate complex limit curves. Most of the limits and formulas recommended by the international standards are integrated. Their variables are programmable to enable the preparation of special specifications

OptiTest consists in CIQ 3.0 QDM and MERLIN modules\* for LF, HF and HV measurements. It facilitates the tasks itemised below

- Creation and administration of test specifications
- Performance of tests



- Report generation after testing
- Basic statistic evaluation

The core features of OptiTest comprise among others data evaluations and archiving functions as well as the connection of testing equipment.

\*Please contact AESA for more information about the Quality Management System CIQ 3.0

[www.aesaciq.com](http://www.aesaciq.com)    [www.aesa-cortailod.com](http://www.aesa-cortailod.com)


\*depending on the ordered system

### 4.1. Test Plan Creation (Example includes options)

A wide range of measurement modes are available as options, such as HF Sweep, HF Sweep(Alien), HF Coax-50, HF Coax-75, HF fixed frequency, LF single cores, LF pairs, LF triples, LF quads, LCL, LCTL, TCL, TCTL, TI, AS, worst case summaries for HF-Sweep / LF / HF discrete frequencies, inductance, conductance and high voltage.


Report generation is very easy. If set by default, a highly comprehensive report is generated, containing a limit case compilation with graphics and for each measuring block a separate summary with related graphics. It goes without saying that dedicated features for customised reports are also available.

#### Example of adding the required limits for LF or HF specifications

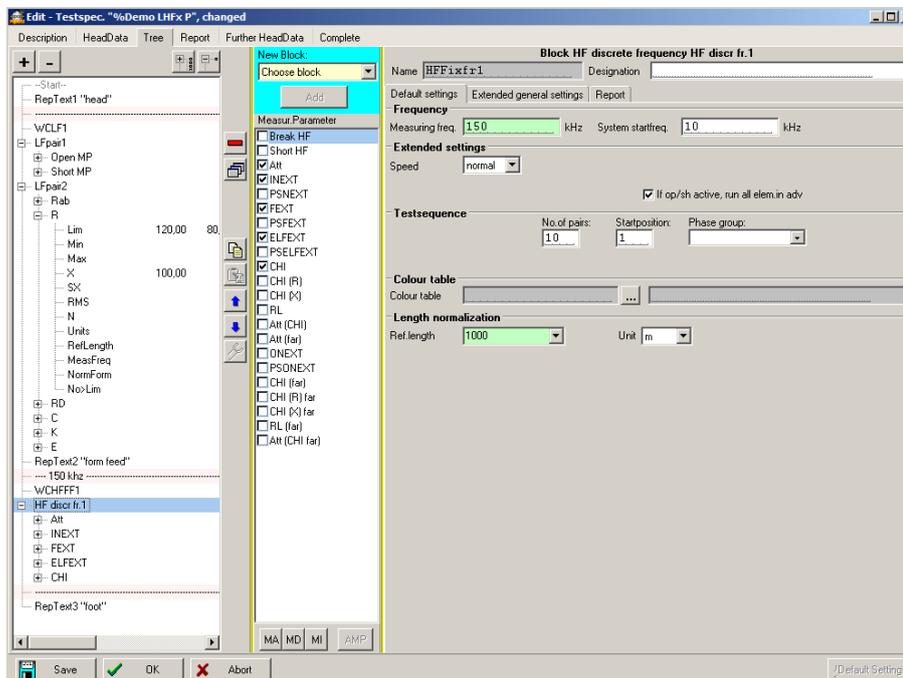



Example of selecting the Parameters to be measured (and printed)

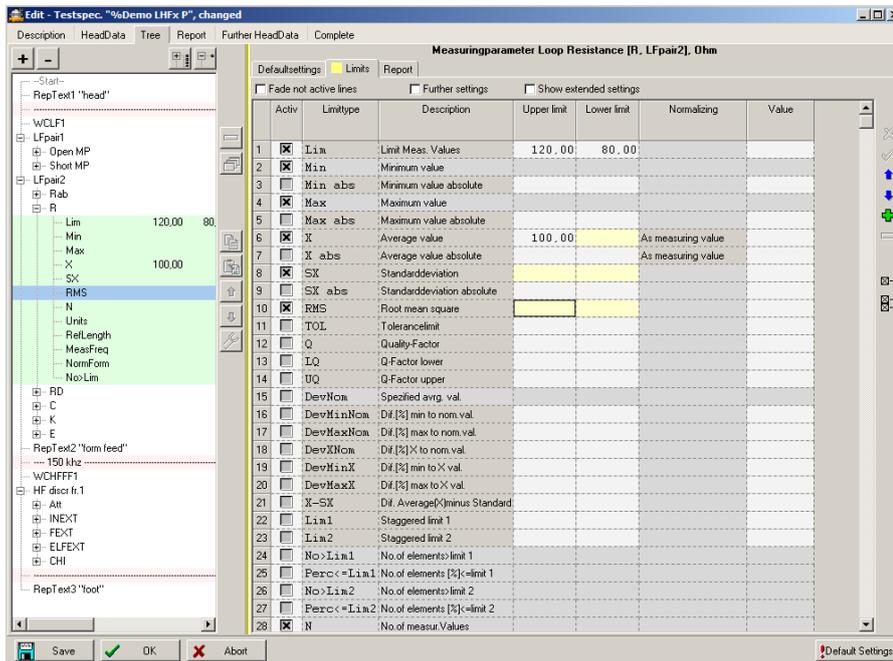

4.2. Document

a) Reports

OptiTest offers various report options such as:

- Test certificates for the customer
- Creating (control) quality charts
- Graphical HF evaluations

The results may be printed, stored as PDF files, or sent as emails.

It is also possible to create data files for Office products such as Microsoft Excel.

b) Evaluation

All data are available for evaluation at any time. Thus, all test data of a cable can be collectively evaluated and printed.

Some examples of how to perform evaluations are:

- Sample list sorted by test order
- Search with pre-defined or customized filters (e.g. searching for the last 20 samples by cable number, date, certain characteristics)
- Free search through the data pool with user-specific search criteria

Filters and search criteria normally generate sample lists which facilitate multiple further actions as:

- Display and process measured values
- Print reports and labels
- Generate quality charts (statistics)

c) Archiving

Windows backup function used for archiving the data.

d) Statistics

Filtering tool: Select a group of measurements according to various criteria such as:

- Cable specification
- Cable structure
- Production period
- Production line, test station
- Etc...

Following the measurements management, this powerful tool allows generating many types of statistics.


Worst case values for a pair or a cable

- Pair identification with extreme values
- Min, max, average values
- Standard deviation, quality factor, RMS values
- Etc...


These statistical means are calculated for all measured LF (and partly HF) parameters

e) Graphical presentation

- Statistical distribution (Gauss type curve)
- Evolution and parameter survey in function of the time
- Measurements repartition in a defined time period to determine the testing load

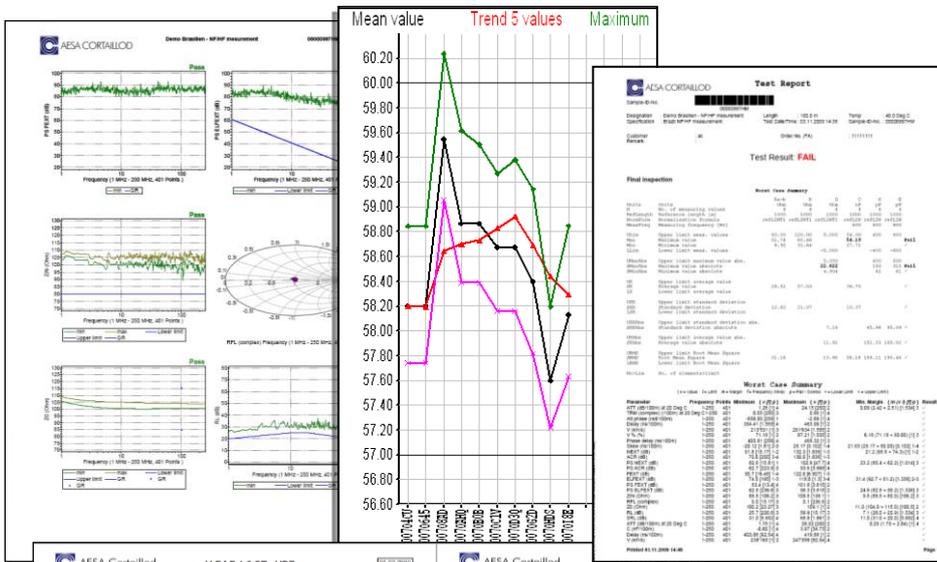

*Examples of test and statistical reports with AESA Optitest*

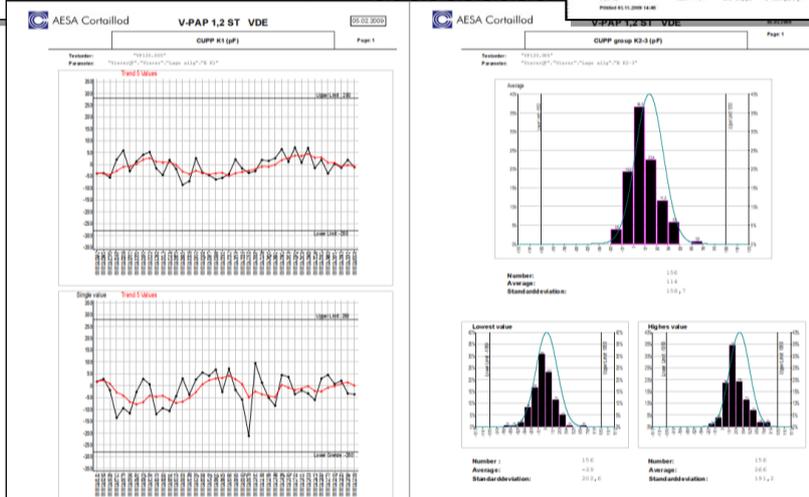

*Examples of statistical reports with AESA Optitest*

## Options

➤ **Set of 5 standards (resist. & capacit.) type AESA 9000**

Article No: 45.9000.0001.0

**Complete ISO 17025 certified LF calibration standards.**

The kit of certified LF calibration standards is composed of:

- **Standard type 9001**  
C1,2 with 19,20 nF  $\pm 0,1 \%$   $\pm 30$  ppM/°C
- **Standard type 9002**  
C1,2 with 192,0 nF  $\pm 0,1 \%$   $\pm 30$  ppM/°C
- **Standard type 9003**  
C3 with 16,00 nF  $\pm 0,1 \%$   $\pm 30$  ppM/°C  
K1, K2, K3 with 16000 pF  $\pm 0,1 \%$   $\pm 30$  ppM/°C
- **Standard type 9004**  
E1, E2, E3 with 12000 pF  $\pm 0,1 \%$   $\pm 30$  ppM/°C
- **Standard type 9005**  
RA, RD with 192  $\Omega$   $\pm 0,01 \%$   $\pm 2$  ppM/°C  
RB, RC with 1920  $\Omega$   $\pm 0,01 \%$   $\pm 2$  ppM/°C



ISO 17025 ACCREDITED



➤ **Set of HF calibration standards (attenuators and loads) type AESA 9800**

Article No: 45.9800.0001.0

With each sold measuring system, AESA delivers a "daily" calibration kit to create the different calibration files necessary to measure LAN cables. These easy-to-use standards have obviously been developed in the symmetrical way as they are placed immediately after the balun transformers to get the maximum accuracy. Unfortunately, these "daily" standards cannot be referenced to primary standards. But AESA has developed its HF technology by using hi-tech strategic components. These miniaturized resistors are sorted and guaranteed up to 3GHz. Tolerance: 1% (50 ppm/deg.) for values between 50 and 200 $\Omega$ .

ISO 17025 ACCREDITED



During a quality control calibration, the symmetric elements have to be replaced by 50 $\Omega$  coaxial standards which are this time certified. In fact, with an appropriate set of terminations and attenuators, it is possible to prove within a certain tolerance that our VEGA system (network analyzer + HF multiplexer



+ connecting frame) is measuring correctly. It is also possible to prove that the calibration used for the measurement of LAN cables has been done correctly.

The kit of certified HF calibration standards is composed of:

- 2 attenuation references –3dB type 9801
- 2 attenuation references –6dB type 9802
- 2 attenuation references –10dB type 9803
- 2 attenuation references –20dB type 9804
- 2 attenuation references –30dB type 9805
- 2 x 50Ω terminations
- 2 special connectors for the terminations
- 4 HF connecting cables for the attenuation
- 1 set of small HF material

### ➤ Spare parts

AESA recommends following set of spare parts for an operation safety of two years:

Helios Type	Mini Kit	Full Kit
1 CKE measuring bridge type KM		✓
1 R measuring bridge type RM		✓
1 LF relay matrix board type AZU		✓
1 CPU board		✓
1 test heads	✓	✓
5 HV relays	✓	✓
1 set of HF cable	✓	✓
1 set of different mechanical and electronic hardware	✓	✓
Article No	50.0900.0003.0	50.0900.0002.0

Other types can be proposed upon request.

### ➤ Printer

Article No: 55.0500.0012.0

LaserJet printer